


Olivia 1



| | |
|--|---------------------------|
| MODEL 147 | |
| 66" x 36" x 23.5" | |
| FREESTANDING 87 gal to overflow | |
| Acrylic CXL® | DoloMatte® |
| 200 lbs / 91 kg | <SOAKER> 225 lbs / 102 kg |
| Filling this tub to the maximum may require an above average size or dedicated water heater. | |


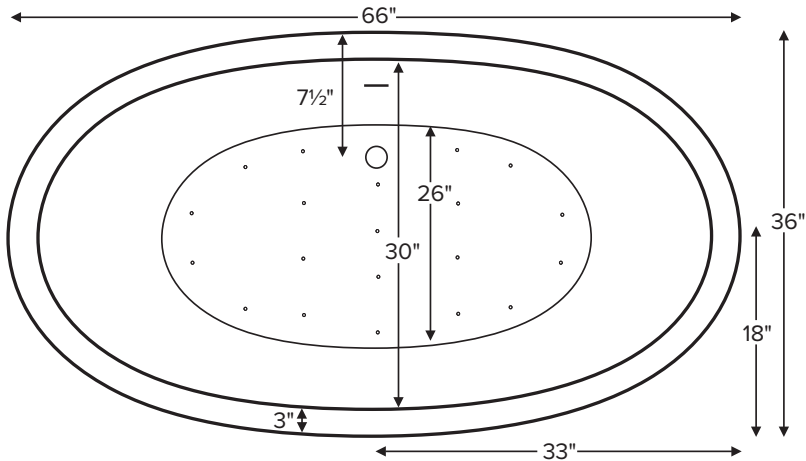


IMPORTANT:
Must have access to the drain from underneath the tub for installation and servicing. Rough in drain pipe directly under the tub drain.

Drain Rough-In Measurement



Requires use of a wall-mounted or freestanding tub filler.
Shown with Air Massage Package.

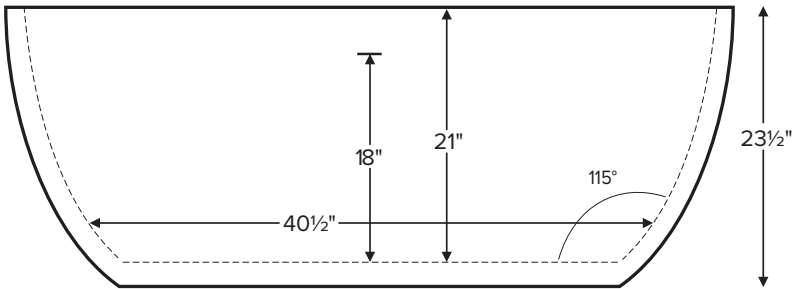

ELECTRICAL COMPONENTS & SPECIFICATIONS

| Hydrotherapy Package | Components Included | 110V GFCI |
|---|------------------------------|-----------|
| Air Massage | heated blower | 1-15 amp |
| Air Massage Elite | heated blower, chromatherapy | 1-15 amp |
| Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information. CSA Certified C/US; B45.5/IAPMO ANSI Z124.1 and ANSI 112.19.7 | | |

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to equipment.
- No access panel. Tub features factory-installed overflow with toe tap drain.
- Air baths require job site preparations for remote mounting the blower and required check valve. Check valve must be installed higher than the rim of the tub.
- Hydrotherapy equipment may ship loose for remote installation depending on tub model. See package content on the following page for details.
- Radiance placed on floor locations will affect placement of air jets.
- Faucet valves cannot be installed on this tub model.
- All tubs are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

- Before discarding tub packaging, check for accessories that may be packaged inside.
- All product measurements are $\pm 1/2$ ".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.



- Airbath blower ships loose for remote installation on site.
- See the Installation & Operation Manual for more details.

Olivia 1

MODEL 147

66" x 36" x 23.5"

| Hydrotherapy Packages | Package Contents | Acrylic CXL® | | DoloMatte® | |
|-----------------------|---|--------------|----------|------------|----------|
| | | Part # | MSRP | Part # | MSRP |
| Soaker | Soaking bath - no jets; includes a pre-leveled foam base and slotted integrated overflow and toe-tap drain kit in chrome. | S147 | \$10,720 | S147DM | \$11,440 |
| Air Massage | 20 air jets, heated air blower, pre-leveled foam base and slotted integrated overflow and toe-tap drain kit in chrome. Blower and control boxes must be remote located. | AST147 | \$14,005 | AST147DM | \$14,725 |
| Air Massage Elite | 30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam and slotted integrated overflow and toe-tap drain kit in chrome. Blower, control boxes and Spa Mode keypad must be remote located/mounted. | AE147 | \$15,715 | AE147DM | \$16,435 |

RECOMMENDED SENSORY THERAPIES

Chromatherapy
(LE) **\$800** underwater lighting
2 LED lights included

Audiotherapy
(STEREOBT) **\$1,390** 2 transducers
with bluetooth and amplifier
(BTREMOTE) **\$600** bluetooth remote

(STEREOH202) **\$1,575** 4 transducers
amplifier not included

Thermaltherapy
(RAD100) **\$1,595** Radiance®
2 heated zones included

| Options <i>Must be ordered at time of purchase</i> | Accessories | | |
|--|---|--|--|
| Standard Colors White (CWH) | Pillows from \$180 | | |
| Textured Bottom (TXTBTM) Acrylic CXL® only \$105 DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests. | Teak Bath Mat (TKMAT3018) \$815 <i>Custom sizes also available. Contact MTI for details and pricing.</i> | | |
| | Teak Tub Tray Slatted (TK-TRAY1) \$500 Solid (TK-TRAY2) \$570 | | |
| | Floor-Mounted High-Flow Tub Filler Traditional Brushed Nickel (FILLTBN) \$1,745 | | |
| | Faucet Stand SculptureStone® Standard <table><tr><td>Small 3-hole capacity 14¼" w x 21¾" h Matte (STAND) \$725</td><td>Large 5-hole capacity 22" w x 21¾" h Matte (STANDL) \$855</td></tr></table> +\$430 gloss finish upcharge (SSGLOSSSNK) | Small 3-hole capacity 14¼" w x 21¾" h Matte (STAND) \$725 | Large 5-hole capacity 22" w x 21¾" h Matte (STANDL) \$855 |
| Small 3-hole capacity 14¼" w x 21¾" h Matte (STAND) \$725 | Large 5-hole capacity 22" w x 21¾" h Matte (STANDL) \$855 | | |

Drains & Overflow Kits *Must be ordered at time of purchase*

Integrated Overflow with Toe Tap
Slotted Overflow
PVC drain - Chrome (SLOTIOC) included
Finish Upcharge
White (SLOTIOWHU) **\$65**
Brushed Nickel (SLOTIOBNU) **\$65**
Polished Nickel (SLOTIOPNU) **\$105**

Brass Tailpiece (WIOBS) \$85
May be ordered separately

Quick Connect Drain - (WOQ) \$460