




Available as a freestanding model or finished on 1, 2 or 3 sides for various installation applications.

Designer Collection Tubs


Andrea® 1 with Sculpted Finish®

MODEL 91A		
71.625" x 31.625" x 24.75"		
FREESTANDING or ALCOVE 80 gal to overflow		
Acrylic CXL®	DoloMatte®	
160 lbs / 73 kg	<SOAKER>	180 lbs / 82 kg
Filling this tub to the maximum may require an above average size or dedicated water heater.		

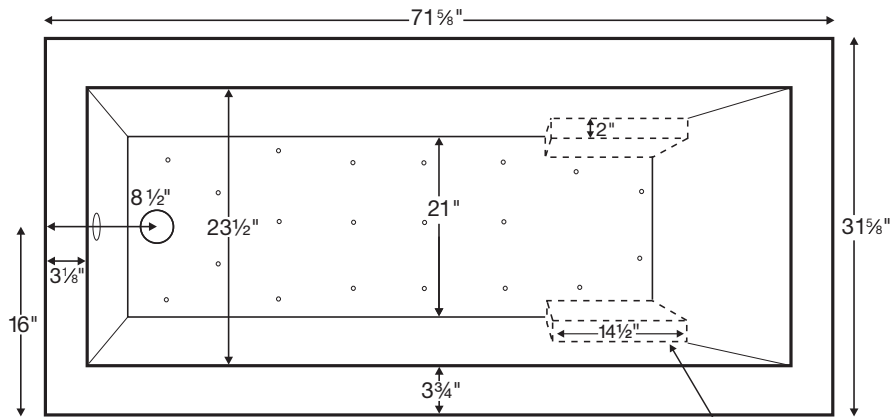

Optional Integral Armrests

The Sculpted Finish process does not allow enough space for mounting fixtures on the tub deck.
Shown as Air Bath

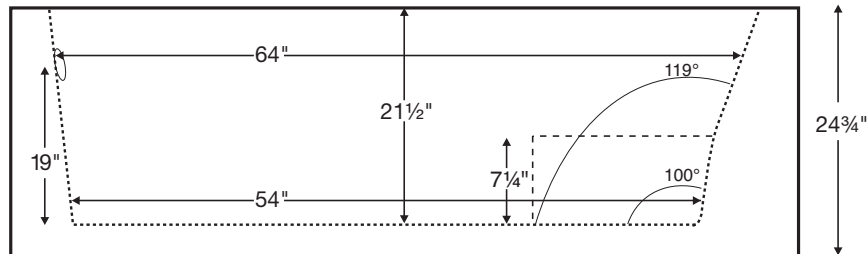

ELECTRICAL COMPONENTS & SPECIFICATIONS

Hydrotherapy Package	Components Included	GFCI/110V
Microbubbles	Microbubbles pump	1-15 amp
Air Massage	heated blower	1-15 amp
Microbubbles with Air	Microbubbles pump, heated blower	1-20 amp
Air Massage Elite	heated blower, chromatherapy	1-15 amp
Microbubbles with Air Elite	Microbubbles pump, heated blower, chromatherapy	2-15 amp

Electrical requirements may change with the addition of optional therapy components. See specific option details or installation information.
CSA Certified C/US; B45.5/1APMO ANSI Z124.1 and ANSI 112.19.7

See the Installation & Operation Manual for more details.
MTI's Customer Service: Monday-Friday 8am-6pm EST
800-783-8827 or service@mtibaths.com

IMPORTANT ORDERING & INSTALLATION INFORMATION

- Before ordering or installing, please consider future access to equipment.
- Unless ordering Sculpted Finish on 4 sides, please include a diagram specifying which sides will need to be finished, along with location of optional tile flange(s).
- Overflow is factory installed for provided toe tap drain.
- When ordering an air bath, the air blower must be remote mounted.
- Microbubbles system components must be installed on a non-Sculpted Finish side. Components will extend beyond the perimeter of the tub. Call MTI for specific details regarding the desired installation before placing the order.
- Radiance placed on floor locations will affect placement of air jets.
- Hydrotherapy equipment may ship loose for remote installation. See package content on the following page for details.
- Faucet valves cannot be installed on this tub model.
- All tubs are compliant with ASTM C 1028-07 coefficient of friction. DoloMatte meets ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 slip tests.

- Options and accessories may be packaged inside the tub crate. Always check packaging before discarding.
- All product measurements are $\pm 1/2$ ".
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

CSA # MTDS-91A

CSA # MTDS-91D

©2023 by MTI Baths, Inc. Modification Rights Reserved



Andrea® 1
with Sculpted Finish®
MODEL 91A
71.625" x 31.625" x 24.75"

Hydrotherapy Packages	Package Contents	Sculpted Finish Sides	Acrylic CXL®		DoloMatte®	
			Part #	MSRP	Part #	MSRP
Soaker	Soaking bath - no jets, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	S91A4	\$8,645	S91D4	\$9,725
		3-sides sculpted	S91A3	\$8,000	S91D3	\$8,945
		2-sides sculpted	S91A2	\$6,465	S91D2	\$7,275
		1-side sculpted	S91A1	\$6,090	S91D1	\$6,765
Microbubbles	1 infusion port, microbubbles pump, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	n/a	n/a	n/a	n/a
		3-sides sculpted	M91A3	\$10,990	M91D3	\$11,935
		2-sides sculpted	M91A2	\$9,455	M91D2	\$10,265
		1-side sculpted	M91A1	\$9,080	M91D1	\$9,755
Air Massage	20 air jets, heated air blower, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	AST91A4	\$11,930	AST91D4	\$13,010
		3-sides sculpted	AST91A3	\$11,285	AST91D3	\$12,230
		2-sides sculpted	AST91A2	\$9,750	AST91D2	\$10,560
		1-side sculpted	AST91A1	\$9,375	AST91D1	\$10,050
Air Massage Elite	30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	AE91A4	\$13,640	AE91D4	\$14,720
		3-sides sculpted	AE91A3	\$12,995	AE91D3	\$13,940
		2-sides sculpted	AE91A2	\$11,460	AE91D2	\$12,270
		1-side sculpted	AE91A1	\$11,085	AE91D1	\$11,760
Microbubbles with Air Massage	1 infusion port, microbubbles pump, 20 air jets, heated air blower, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	n/a	n/a	n/a	n/a
		3-sides sculpted	ASTM91A3	\$13,735	ASTM91D3	\$14,680
		2-sides sculpted	ASTM91A2	\$12,200	ASTM91D2	\$13,010
		1-side sculpted	ASTM91A1	\$11,825	ASTM91D1	\$12,500
Microbubbles with Air Massage Elite	1 infusion port, microbubbles pump, 30 air jets, heated air blower, Chromatherapy LED lighting, Spa Mode, pre-leveled foam base, factory installed rectangular overflow with toe tap drain	4-sides sculpted	n/a	n/a	n/a	n/a
		3-sides sculpted	AEM91A3	\$15,355	AEM91D3	\$16,300
		2-sides sculpted	AEM91A2	\$13,820	AEM91D2	\$14,630
		1-side sculpted	AEM91A1	\$13,445	AEM91D1	\$14,120

Microbubbles system components must be installed on a non-Sculpted Finish® side.

Components will extend beyond the perimeter of the tub. Call MTI for specific details regarding the desired installation before placing order.

For more customized applications, additional hydrotherapies may possibly be integrated in Sculpted Finish® tubs, depending on the types of therapy and the installation application. Visit mtibaths.com or call MTI at 800.783.8827.

RECOMMENDED SENSORY THERAPIES

Chromatherapy

(LE) **\$800** underwater lighting
2 LED lights included

Audiotherapy

(STEREOBT) **\$1,390** 2 transducers
with bluetooth and amplifier
(BTREMOTE) **\$600** bluetooth remote

(STEREOH202) **\$1,575** 4 transducers
amplifier not included

Thermaltherapy

(RAD100) **\$1,595** Radiance®
2 heated zones included

For more information on options and accessories go to Acrylic Tub Options on mtibaths.com

Andrea® 1 with Sculpted Finish®
MODEL 91A

Options <i>Must be ordered at time of purchase.</i>	
Standard Color White (CWH) gloss Acrylic CXL, matte DoloMatte	
Textured, Slip-Resistant Bottom (TXTBTM) \$105 DoloMatte® exceeds ANSI A137.1/A326.3 and AS HB198 slip tests.	
Ozonator (OZONE) \$515 <i>Cannot be added to soakers or airbaths without Microbubbles system.</i>	
Integral Armrests - 1 pair (INTARM) \$140 end drain tub models	
Installation Options <i>Must be ordered at time of purchase.</i>	
Tile Flange Factory Installed rigid ABS 1 Side (TFK1) \$175 2 Sides (TFK2) \$185 3 Sides (TFK3) \$200 Field Install Kit (TFKNI) \$185 Includes rigid ABS & adhesive	

IMPORTANT: *Must specify flange location(s) on order of Factory-Installed Flange.*

Accessories	
Pillows from \$180	
Teak Bath Mat (TKMAT3018) \$815 <i>Custom sizes also available. Contact MTI for details and pricing.</i>	
Teak Tub Tray Slatted (TK-TRAY1) \$500 Solid (TK-TRAY2) \$570	
Teak Seat (TK-REMSEAT) \$660 For use with armrests only.	
Floor-Mounted High-Flow Tub Filler Traditional Brushed Nickel (FILLTBN) \$1,745	

Drains & Overflow Kits <i>Must be ordered at time of purchase</i>	
Toe Tap with Rectangular Overflow – PVC Drain Kit <i>Overflow is factory installed</i> Chrome (WOTRC) included Brushed Nickel (WOTRBNU) substitute free of charge White (WOTRWU) \$55 finish upcharge	Brass Body for Rectangular Overflow with Toe Tap (WOTRSBU) \$480 upcharge

Slim-Line Overflow with Toe Tap Drain *Must be ordered at time of purchase*

- May upgrade rectangular overflow to Slim-Line Overflow
- Low profile overflow is factory installed
- Overflow measures 4.5" x 1"
- Provides a deeper soak
- Not available for commercial applications

Slim-Line Overflow with Toe Tap Drain	
PVC Drain	
Chrome (SLOTC) \$500	
Brushed Nickel (SLOTBN) \$530	
Polished Nickel (SLOTPN) \$555	
White (SLOTW) \$430	

Slim-Line Overflow with Toe Tap Drain	
Solid Brass Drain	
Chrome (SLOTSBC) \$930	
Brushed Nickel (SLOTSBBN) \$935	
Polished Nickel (SLOTSBPN) \$935	
White (SLOTSBW) \$965	



Rectangular overflow included



Optional Slim-Line overflow